


描述 / Descriptions


特征 / Features

用途 / Applications

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning

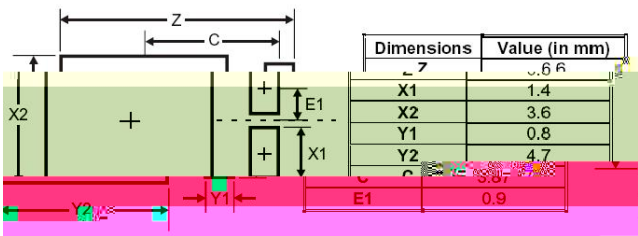

放大及印章代码 /  $h_{FE}$  Classifications & Marking





极限参数 / Absolute Maximum Ratings(Ta=25℃)

|  |   |  |  |
|--|---|--|--|
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  | θ |  |  |


电性能参数 / Electrical Characteristics(Ta=25℃)

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

电参数曲线图 / Electrical Characteristic Curve

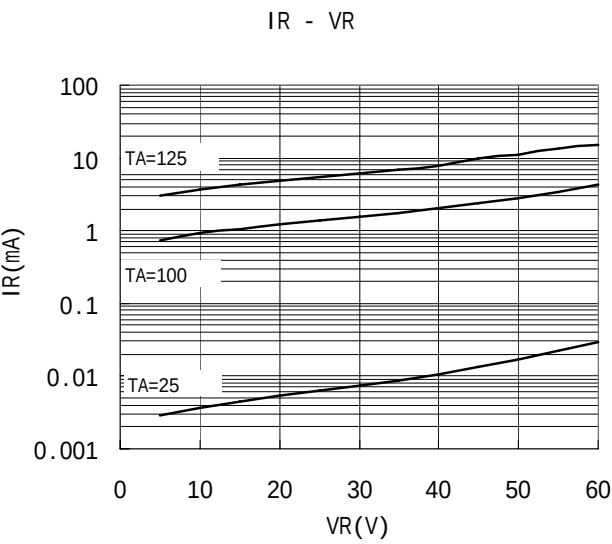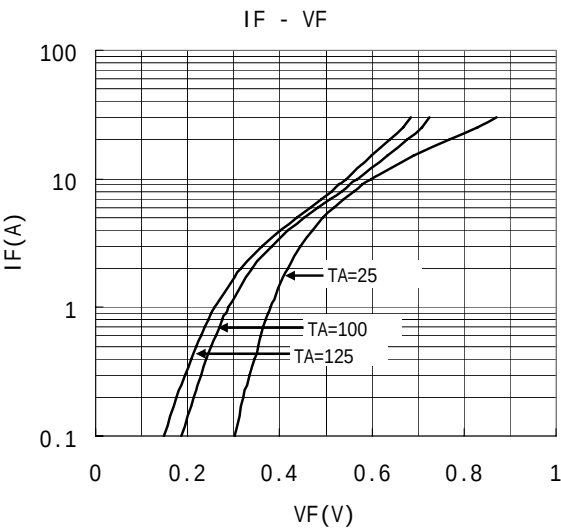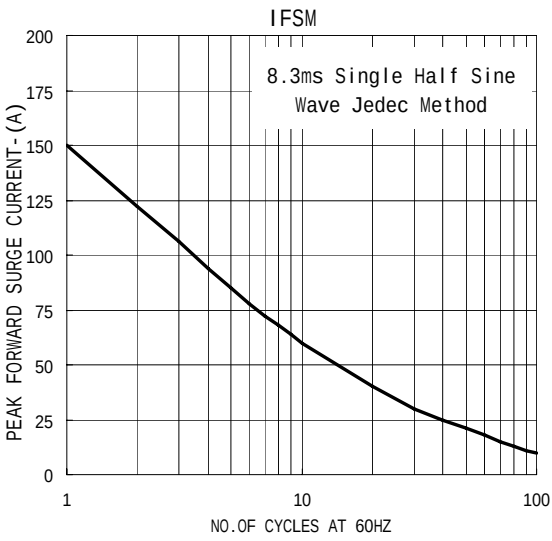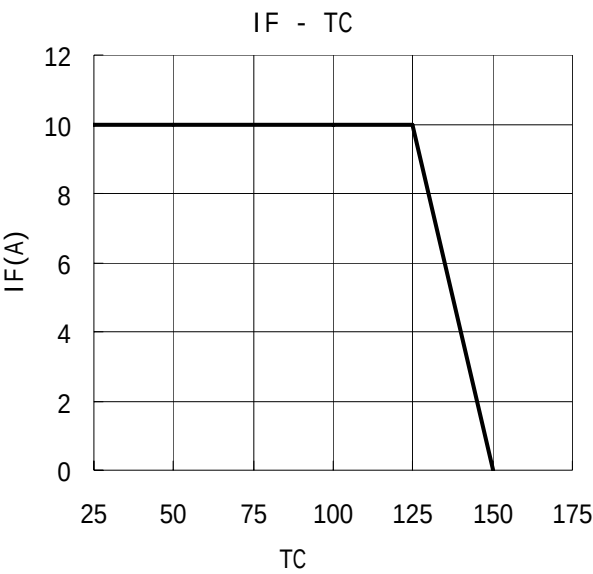


外形尺寸图 / Package Dimensions

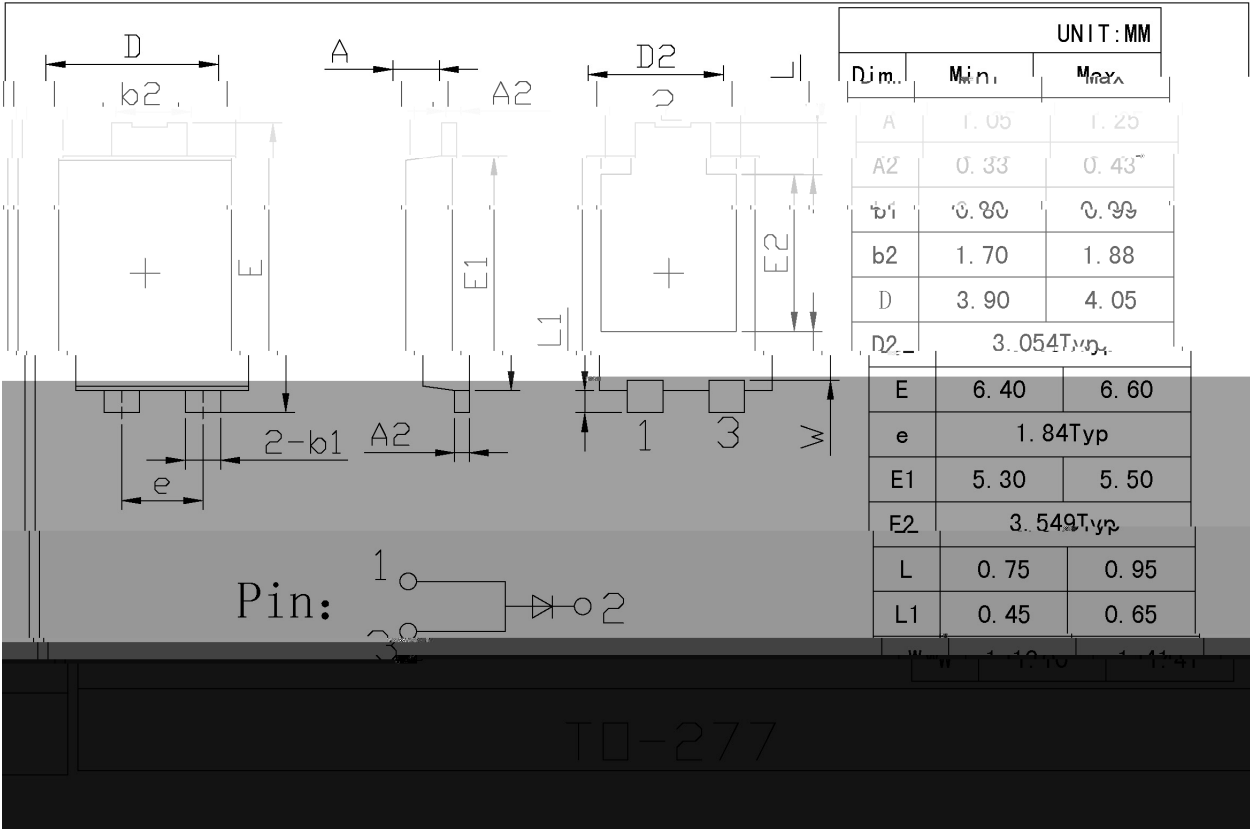

印章说明 / Marking Instructions



回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

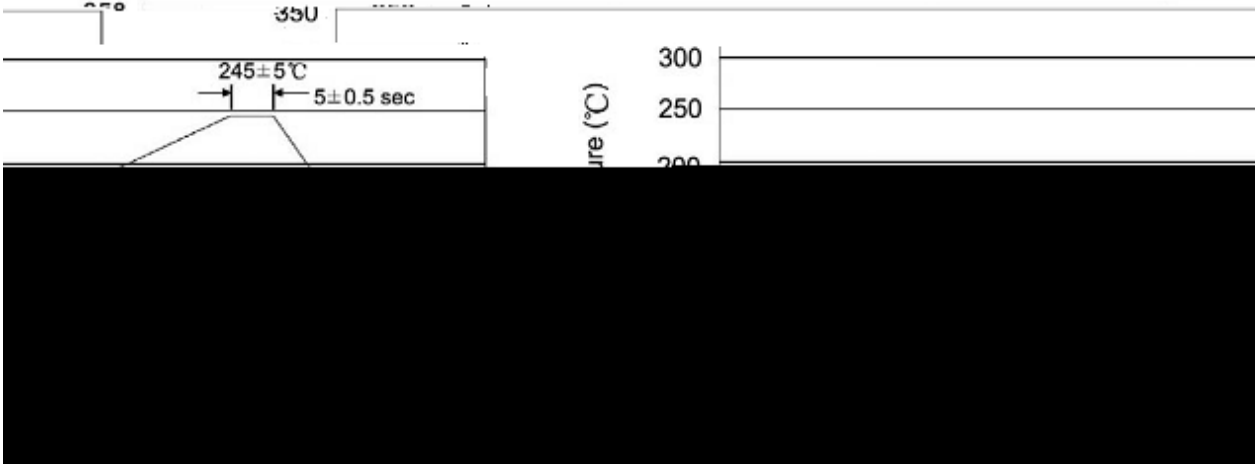

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

包装规格 / Packaging SPEC.

|        | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel   | Inner Box  | Outer Box   |
|--------|-----------------|----------------------|----------------------|----------------------------|----------------------|--------|------------|-------------|
| TO-277 | 5,000           | 3                    | 15,000               | 6                          | 90,000               | 13 ×12 | 360×360×50 | 380×335×366 |

使用说明 / Notices