


ТХ р J 1 ч я 11 1 3 VRG045610 M


616Y6 663Y K б ч я 3 1 η 3 α M Т Т° η f β

4Z 1 5 0 1 1



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size




M 1 "

[illegible]








		()							
		()				()			
						Ω	(μ)	()	

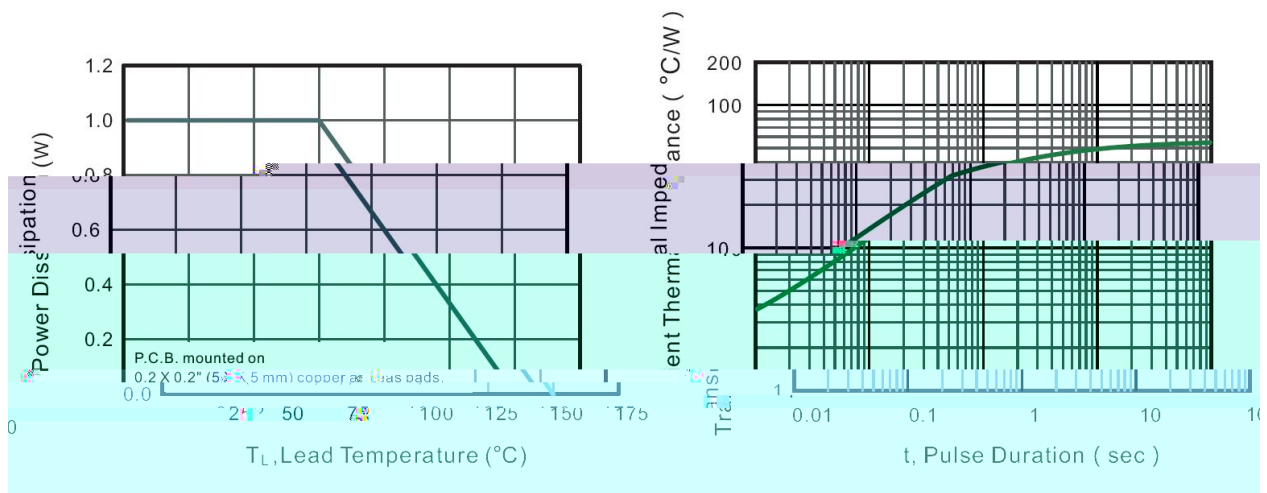

SOD-123FL

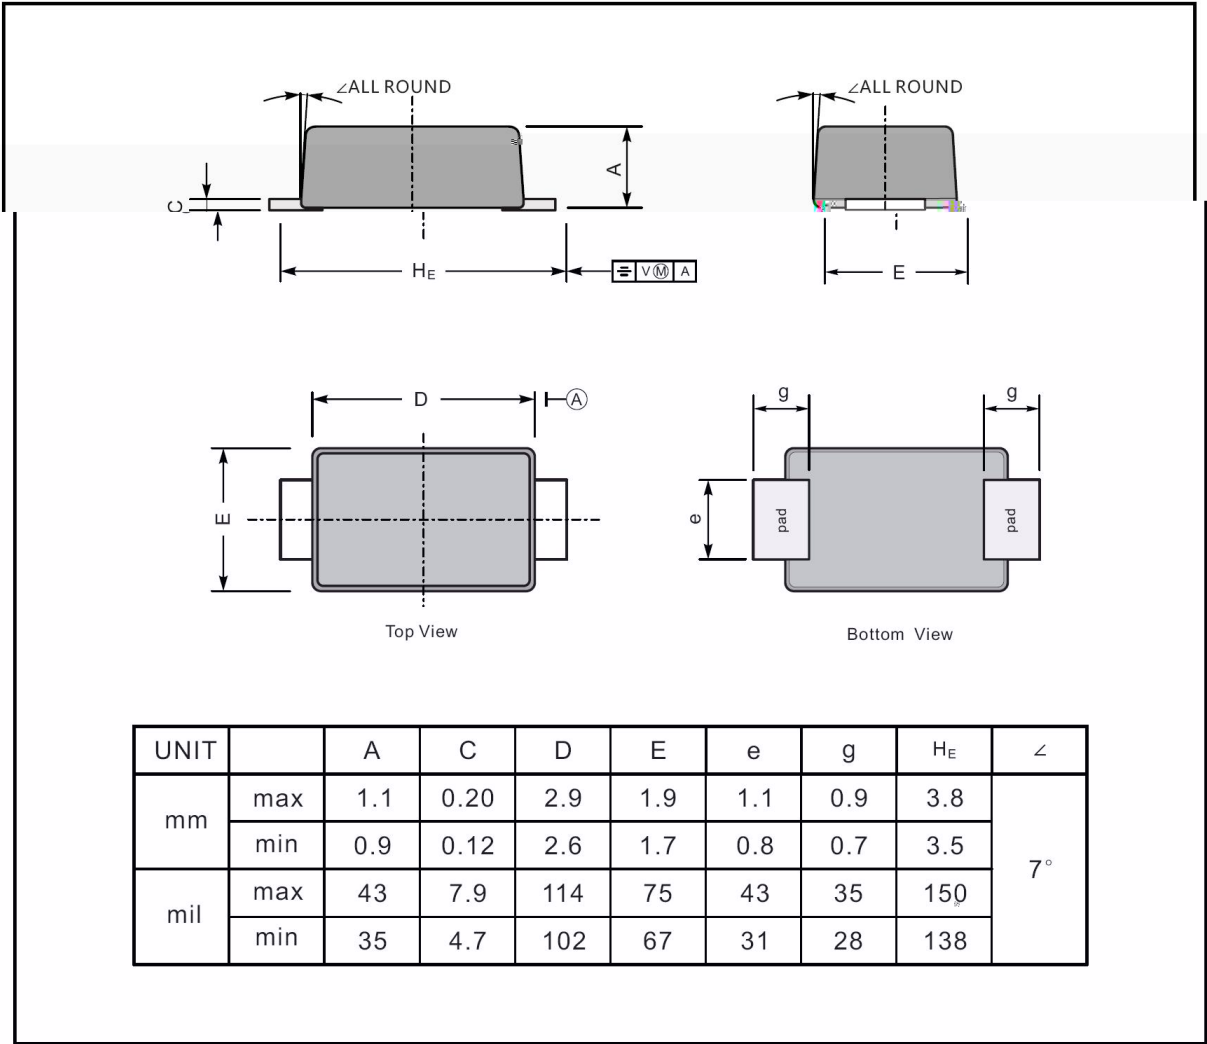



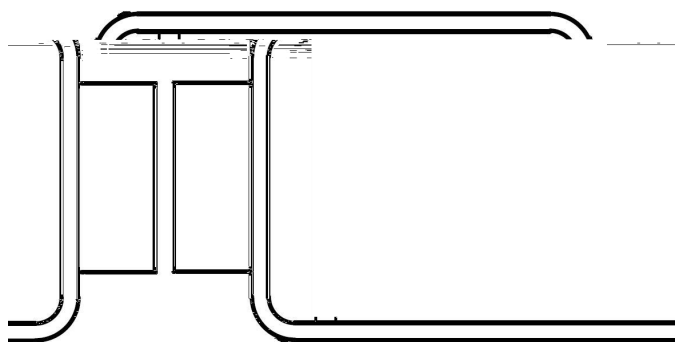

” X
IKR X 3 N Γ
X 1 F ĩ N . 1 4 A Ẅ Γ 1 6 A Ẅ ĩ N Γ

IKR X
X I I



†

○ † ○

†

○ †

○

 σ, γ

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box