

/ Descriptions

TO-220FAC



Ultrafast Recovery Diode in a TO-220FAC Plastic Package.

/ Features

Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.

/ Applications

For high frequency, high voltage, high current rectifier diode, freewheeling diode

/ Equivalent Circuit**/ Pinning**

PIN1 2 Cathode

PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions






Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
RMS Reverse Voltage	V_{RMS}	420	V
DC Blocking Voltage	V_{DC}	600	V
Forward Current	I_F	1 10	A
Peak forward surge current	I_{FSM}	100	A
Typical Thermal Resistance Junction to Case	$R_{\theta Jc}$	4	/W
Junction Temperature Range	T_J	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Voltage	V_R	$I_R=1mA$	600			V
Forward Voltage	V_F	$I_F=2.0A$ $T_C=25$		1.0	1.2	V
		$I_F=2.0A$ $T_C=125$		0.80	1.0	
		$I_F=10A$ $T_C=25$		1.3	1.5	
		$I_F=10A$ $T_C=125$		1.2	1.4	
Instantaneous Reverse Current	I_R Note 1	$V_R=600V$ $T_a=25$			10	μA
		$V_R=600V$ $T_a=125$			500	
Reverse Recovery Time	t_{rr}	$I_F=0.5A$ $I_R=1.0A$ $I_{RR}=0.25A$			50	ns


/Notes

1.


/ Electrical Characteristic Curve

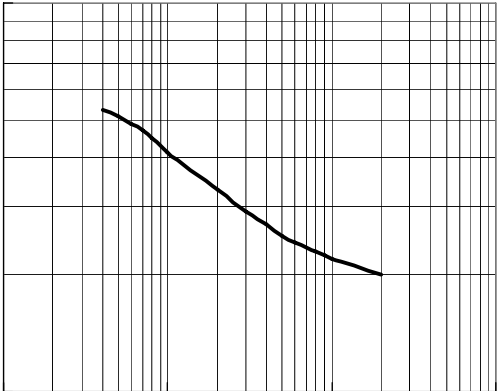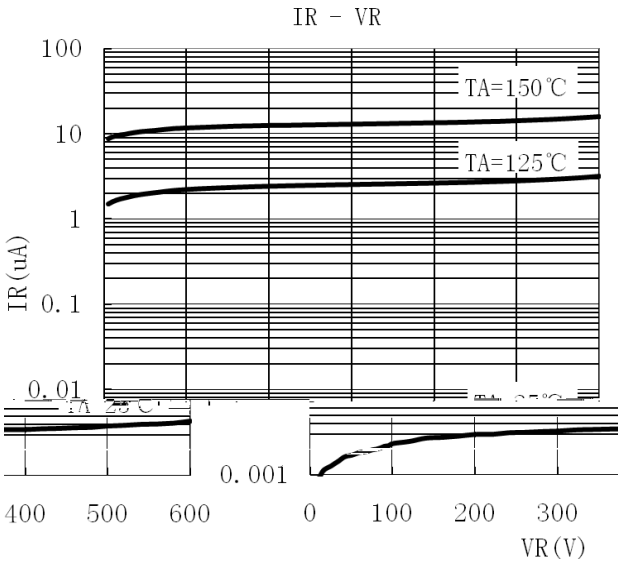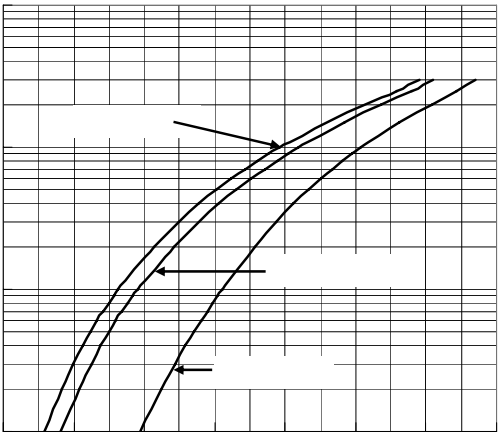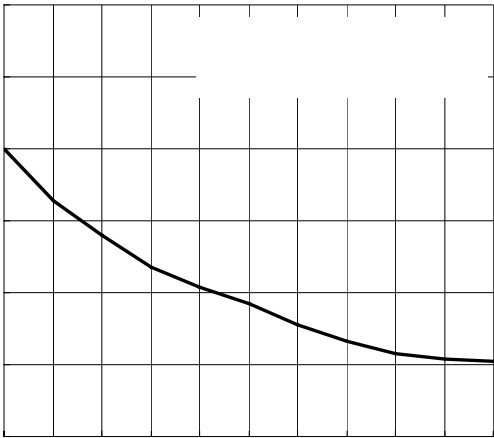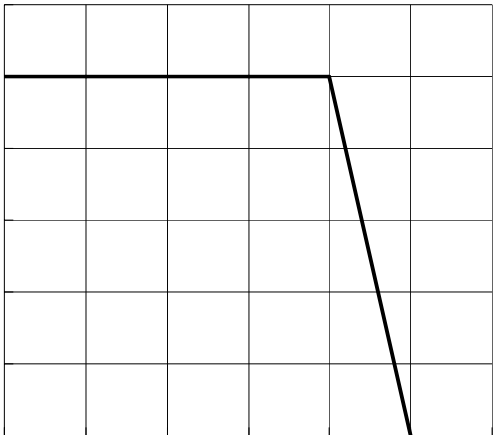

/ Package Dimensions

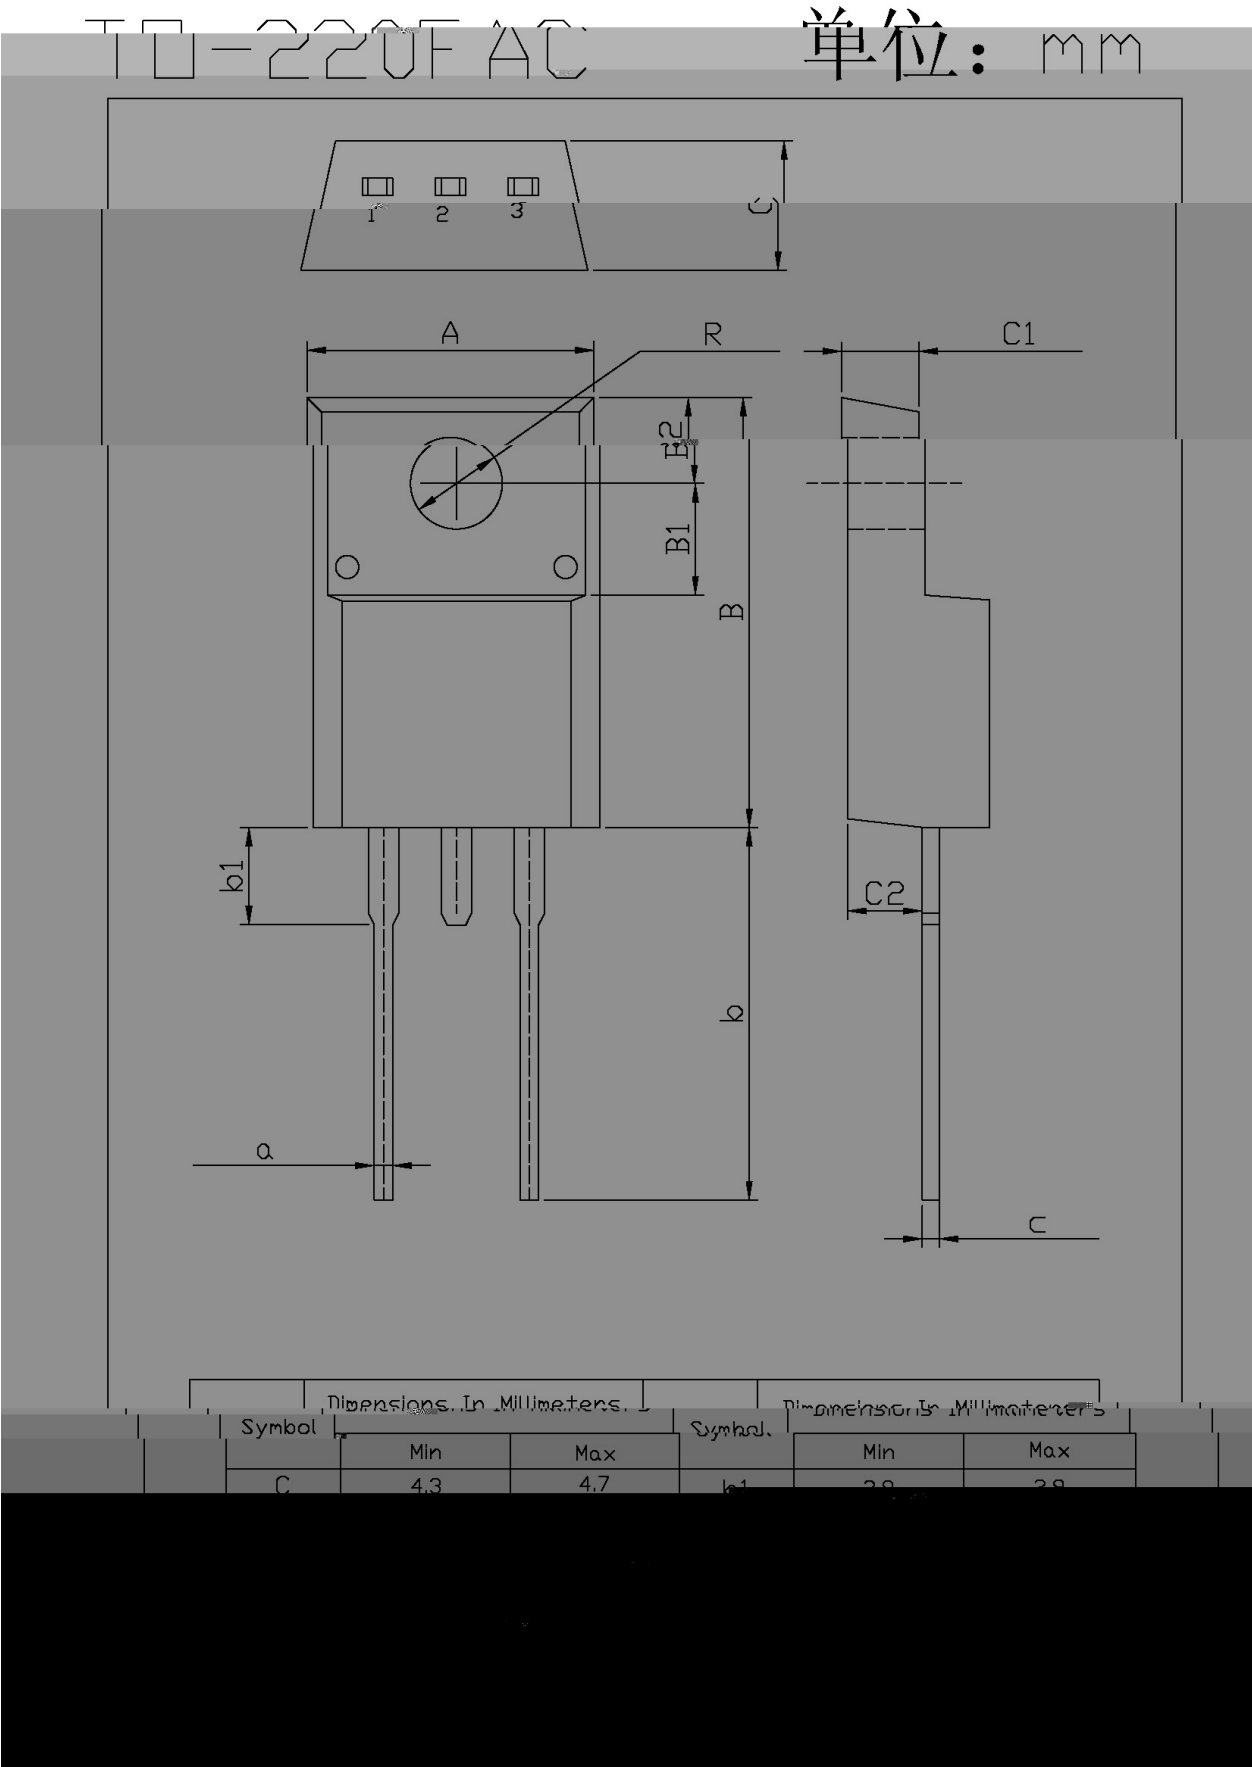

/ Marking Instructions

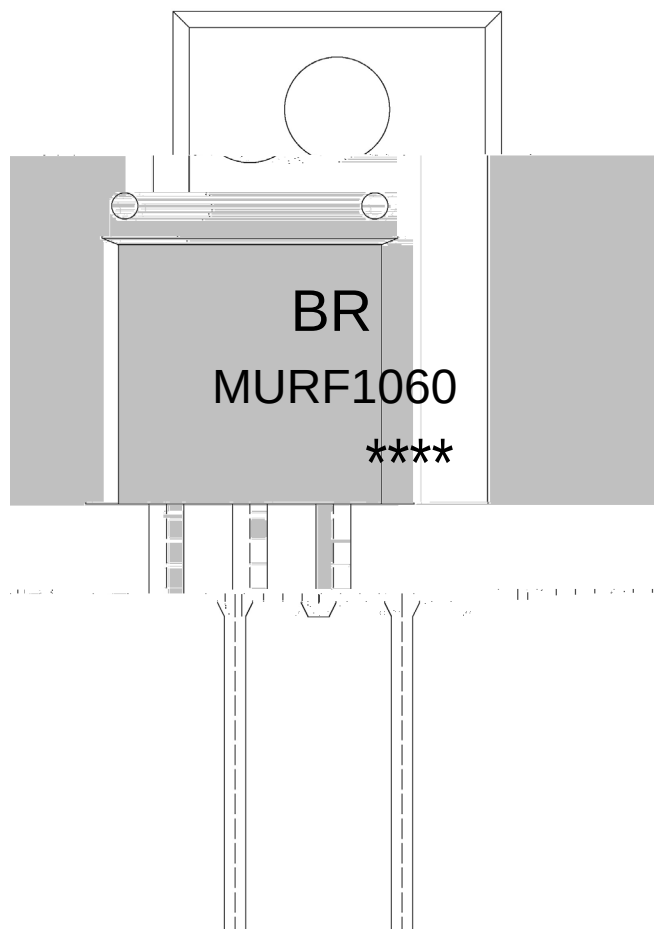

BR

MURF1060

Note:

BR: Company Code

MURF1060 Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)



Note:

- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F/AC/FAC	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-220/F/AC/FAC	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices