

[illegible]



50V~1000V 10A SMC

RoHS 2011/65/EU





参数	符号	数值							单位
	()								
									℃
									℃

参数	符号	测试条件	数值					单位



Fig.1 Forward Current Derating Curve

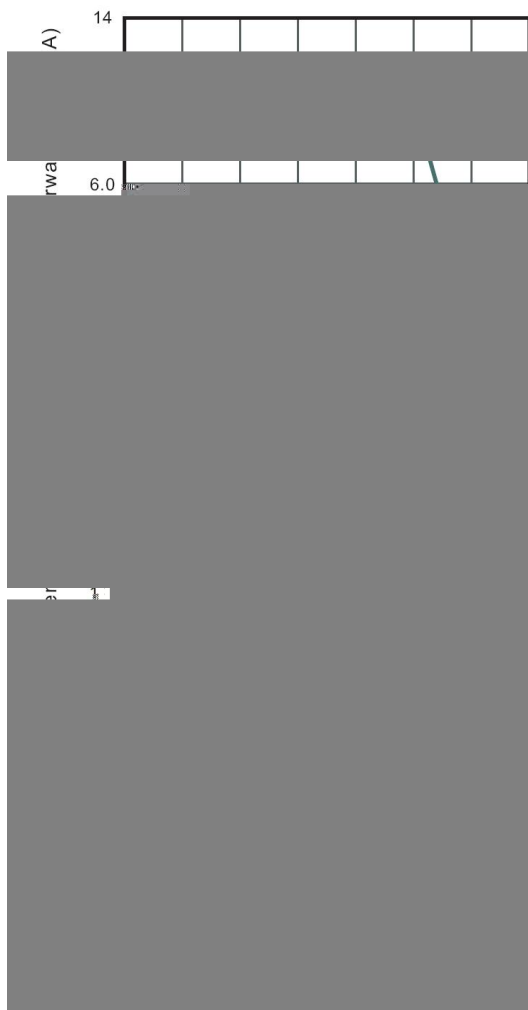


Fig.2 Typical Reverse Characteristics




Forward Surge Current



max	2.62	7.0	6.2	9.0	0.21
-----	------	-----	-----	-----	------



Temperature Profile for IR Reflow Soldering(Pb-Free)

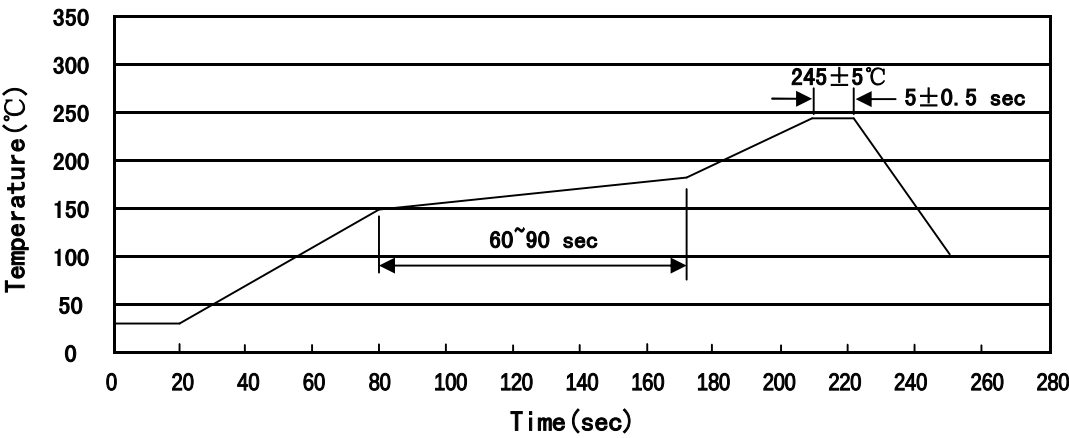

± °C

± °C

± °C

± °C

± °C

± °C

± °C

± °C

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
						"		