


83Y£4333Y5!3DVPEI


UrKV53442982HX0

1




PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

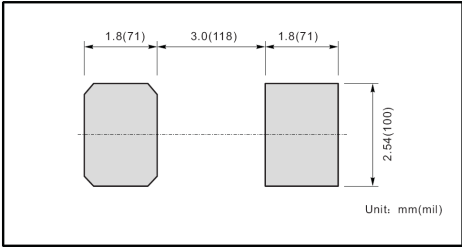


℃	()								
)									
)	Δ								℃
									℃

			数值	
		℃		μ
		℃		μ

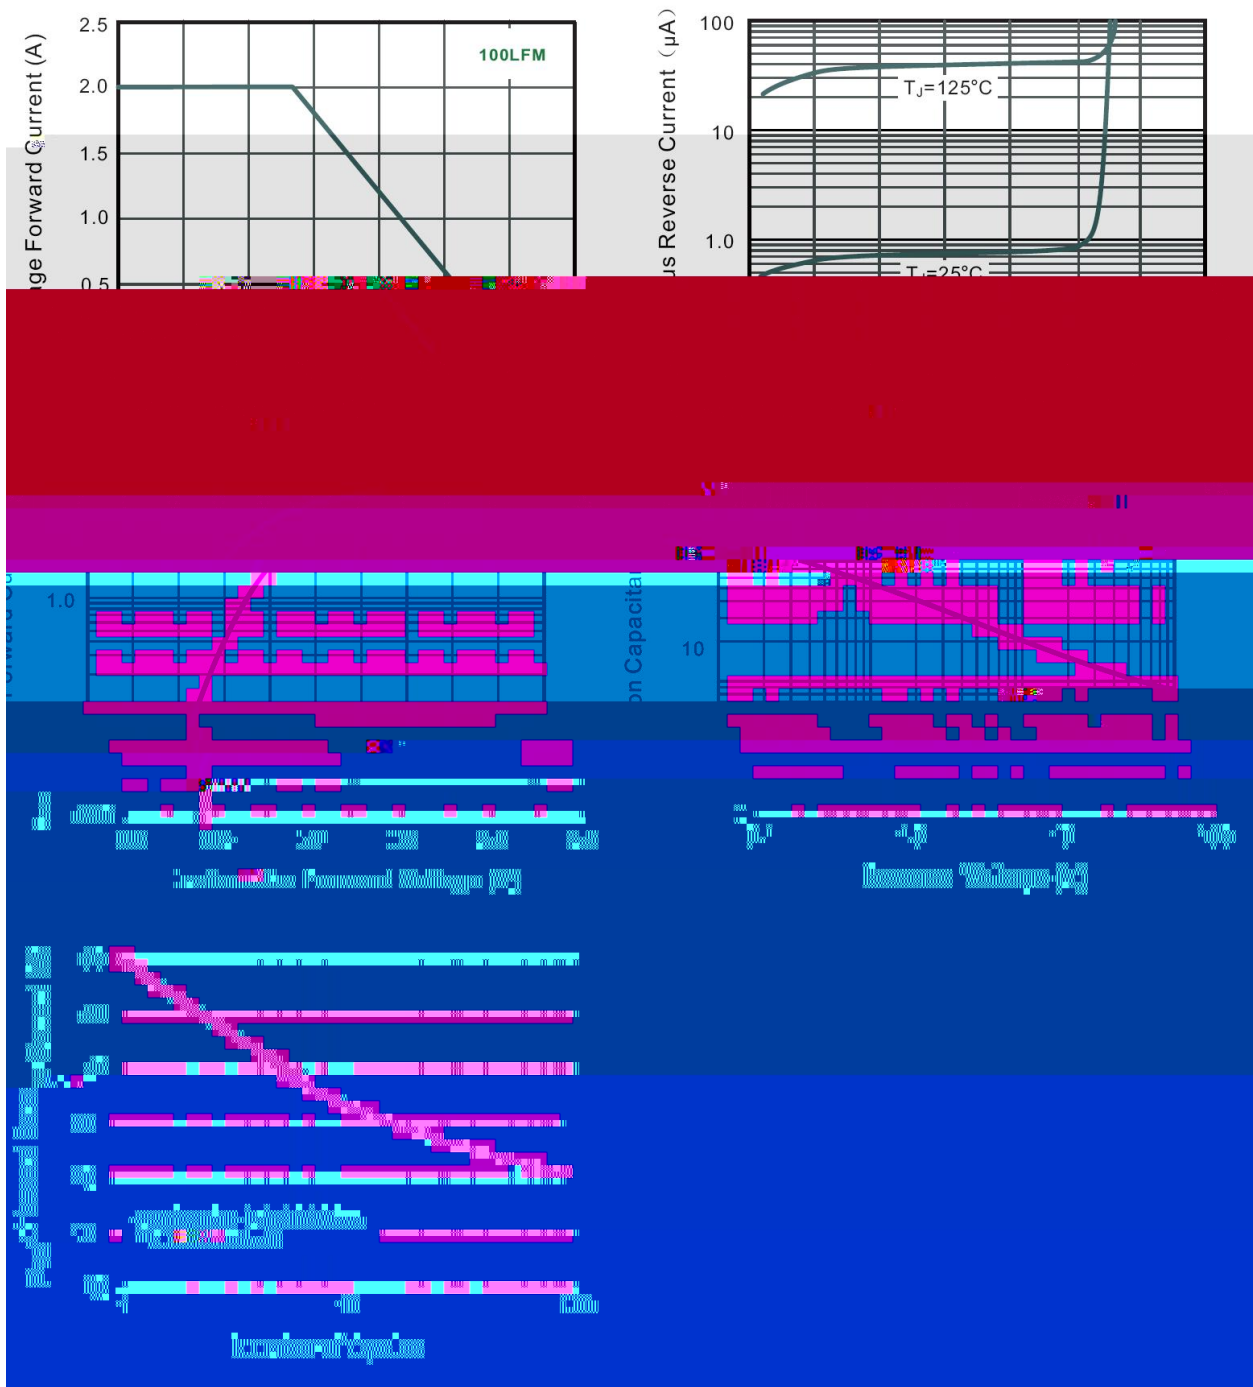


SMBF

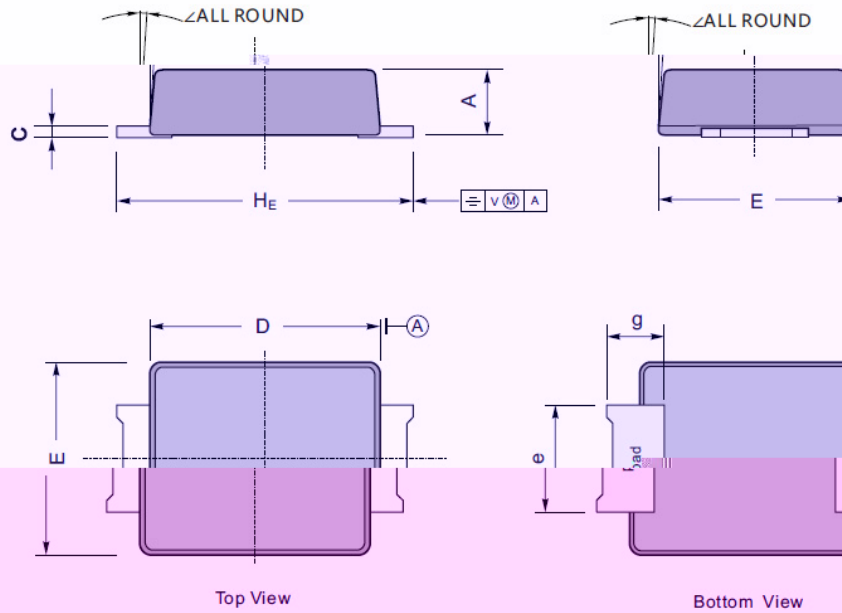

UNIT		A	C	D	E	H _E	e	g	∠
mm	max	1.3	0.26	4.4	37.7	55.0	22.2	1.0	9°
	min	1.1	0.18	4.2	3.5	5.1	1.9		
mil	max	51	10	173	146	216	86	40	
	min	43	7	165	138	200	75		

Marking

Type number	Marking code
S2ABF ...	S2AB
S2BBF ...	S2BB
S2DBF ...	S2DB
S2GBF ...	S2GB
S2JBF ...	S2JB
S2KBF ...	S2KB
S2MBF ...	S2MB

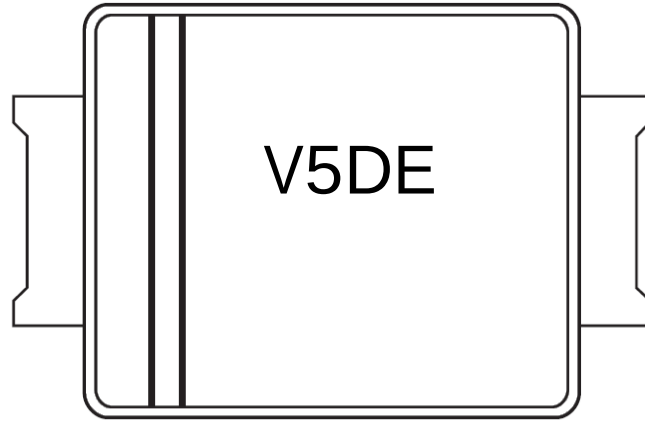

Temperature Profile for IR Reflow Soldering(Pb-Free)

$\frac{3}{8}$
2 $\frac{3}{8}$ 2 $\frac{3}{8}$ 2