

**TL431**

Rev.G Jan.-2022

## / Descriptions

TO-92

Precision adjustable shunt regulator in a TO-92 Plastic Package.

## / Features

2.495V; 0.5%,1% 2%; 1.0mA 100mA; ;  
 $V_O=V_{ref}$  36V; ( :50 $\mu$ A); ( :0.15 $\Omega$ )

Precise reference voltage to 2.495V;guaranteed 0.5%,1% or 2% reference voltage Tolerance; sink current capability,1.0mA ~ 100mA;quick turn-on; adjustable Output voltage,  $V_O=V_{ref} \sim 36V$ ;low operational cathode current,50 $\mu$ A typical; 0.15 $\Omega$  typical output impedance.

## / Applications

Linear regulators, adjustable power supply, switching power supply.

## / Equivalent Circuit



## / Pinning



1 2 3  
 PIN1 K      PIN 2 A      PIN 3 R

## / Marking

See Marking Instructions

/ Absolute Maximum Ratings(Ta=25 )

| Parameter                                 | Symbol    | Rating    | Unit |
|-------------------------------------------|-----------|-----------|------|
| Cathode to Anode Voltage                  | $V_{KA}$  | 37        | V    |
| Cathode Current Range, Continuous         | $I_K$     | -100~+100 | mA   |
| Reference Input Current Range, Continuous | $I_{REF}$ | 0.05~+10  | mA   |
| Power Dissipation                         | $P_D$     | 770       | mW   |
| Operating Ambient Temperature             | $T_{amb}$ | -40~125   | °C   |
| Junction Temperature                      | $T_j$     | 150       | °C   |
| Storage Temperature Range                 | $T_{stg}$ | -65~150   | °C   |


/ Electrical Characteristics(Ta=25 )

| Parameter                                                                   | Symbol                           | Test Conditions                                                         | Min   | Typ   | Max   | Unit     |
|-----------------------------------------------------------------------------|----------------------------------|-------------------------------------------------------------------------|-------|-------|-------|----------|
| Reference Input Voltage                                                     | $V_{REF}$                        | $V_{KA}=V_{REF}$<br>$I_K=10mA(A=0.5\%)$                                 | 2.483 | 2.495 | 2.507 | V        |
|                                                                             |                                  | $V_{KA}=V_{REF}$<br>$I_K=10mA(B=1\%)$                                   | 2.470 | 2.495 | 2.520 | V        |
|                                                                             |                                  | $V_{KA}=V_{REF}$<br>$I_K=10mA(2\%)$                                     | 2.445 | 2.495 | 2.545 | V        |
| Deviation of Reference Input Voltage Over-Temperature                       | $\Delta V_{REF} / \Delta T$      | $V_{KA}=V_{REF}$ $I_K=10mA$<br>$T_A=-40\sim 125^\circ C$                |       | 4.5   | 25    | mV       |
| Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage | $\Delta V_{REF} / \Delta V_{KA}$ | $I_K=10mA$ ,<br>$\Delta V_{KA}=10V$ to $V_{REF}$                        |       | -1    | -2.7  | mV/V     |
|                                                                             |                                  | $I_K=10mA$ ,<br>$\Delta V_{KA}=36V$ to $10V$                            |       | -0.5  | -2.0  | mV/V     |
| Reference Input current                                                     | $I_{REF}$                        | $I_K=10mA$ $R_1=10K\Omega$<br>$R_2=open$                                |       | 0.8   | 1.0   | $\mu A$  |
| Deviation of Reference Input Current Over Full Temperature Range            | $\Delta I_{REF} / \Delta T$      | $I_K=10mA$ $R_1=10K\Omega$ ,<br>$R_2=open$<br>$T_A=-40\sim 125^\circ C$ |       | 0.4   | 1.2   | $\mu A$  |
| Minimum Cathode Current for Regulation                                      | $I_{K(min)}$                     | $V_{KA}=V_{REF}$                                                        |       | 0.05  | 0.08  | mA       |
| Off-state cathode current                                                   | $I_{K(off)}$                     | $V_{KA}=36V$ $V_{REF}=0V$                                               |       | 0.05  | 1.0   | $\mu A$  |
| Dynamic impedance                                                           | $ Z_{KA} $                       | $V_{KA}=V_{REF}$ $f \leq 1.0KHz$<br>$I_K=1mA$ to $100mA$                |       | 0.15  | 0.5   | $\Omega$ |

/ Electrical Characteristic Curve


Fig.1 Cathode Current

Fig.2 Cathode Current




**& Test circuits&Typical Application**

**BLOCK DIAGRAM:**

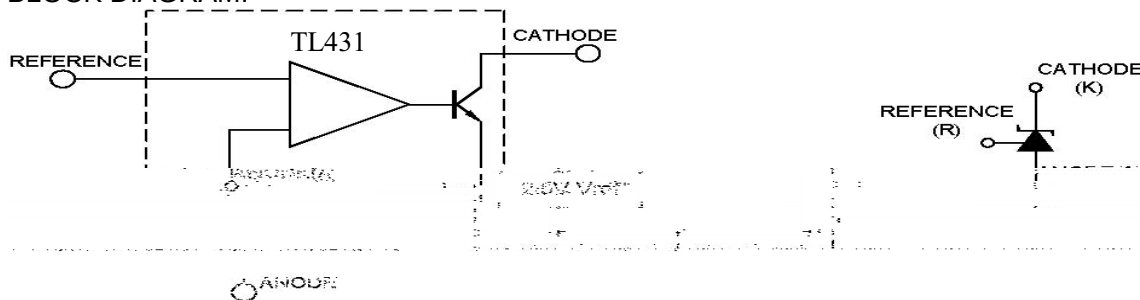

**TEST CIRCUITS:**

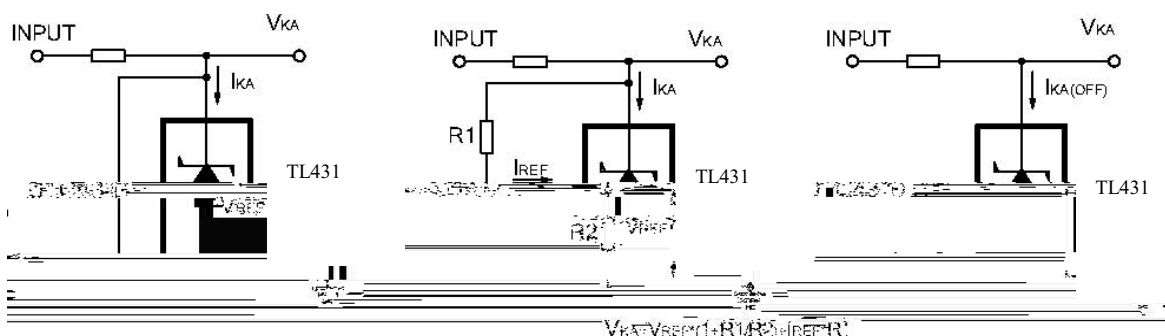


Test Circuit For  $V_{KA}=V_{REF}$

Test Circuit for  $V_{KA} \geq V_{REF}$


Test Circuit For  $I_{KA}(OFF)$

**TYPICAL APPLICATION:**

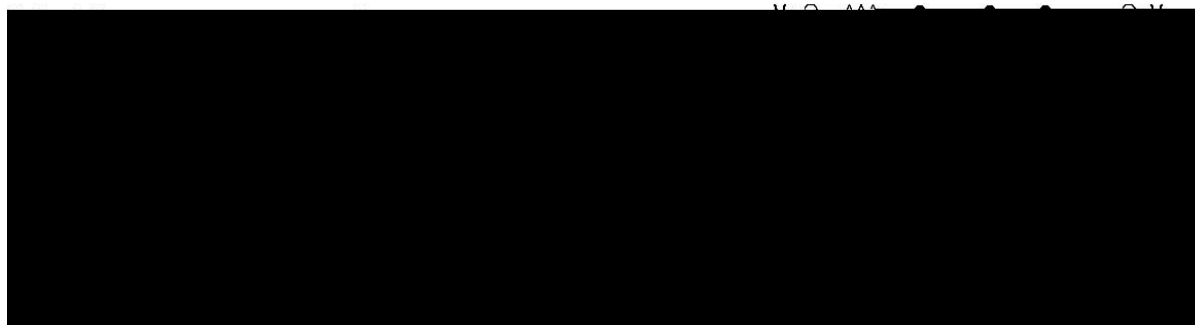


Shutdown Regulator

Higher-current Shunt




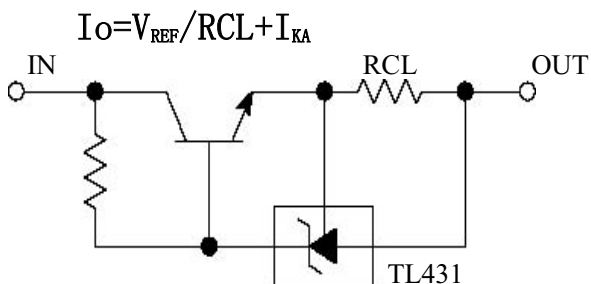


Constant Current Source

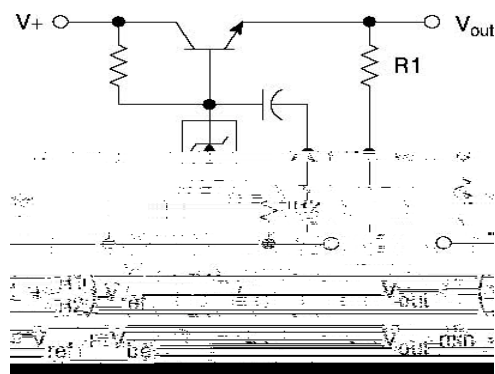


Series Pass Regulator

/ Package Dimensions

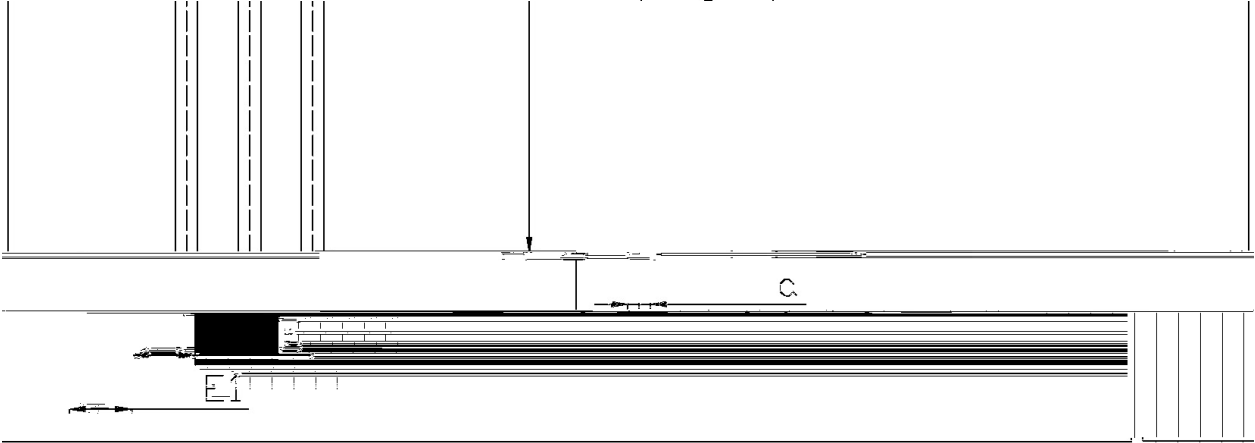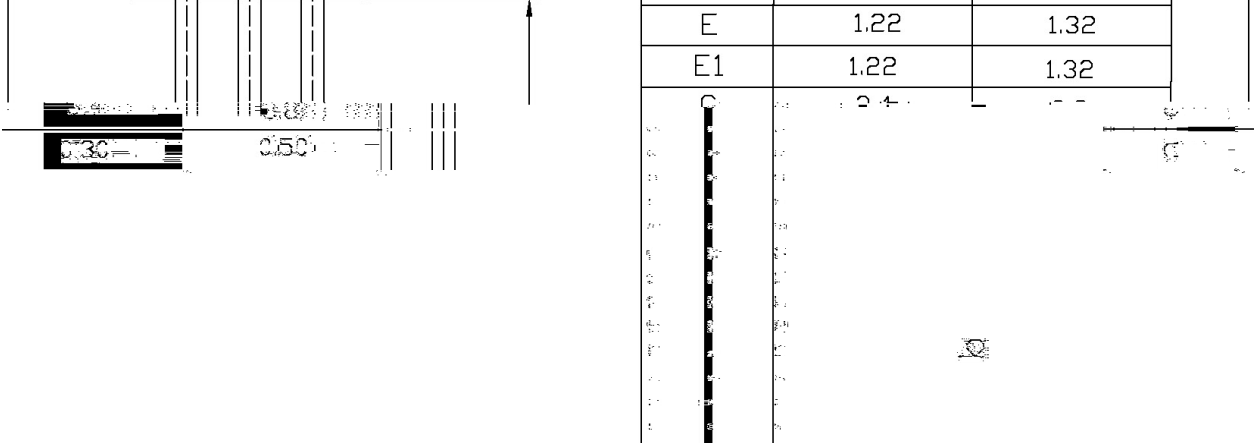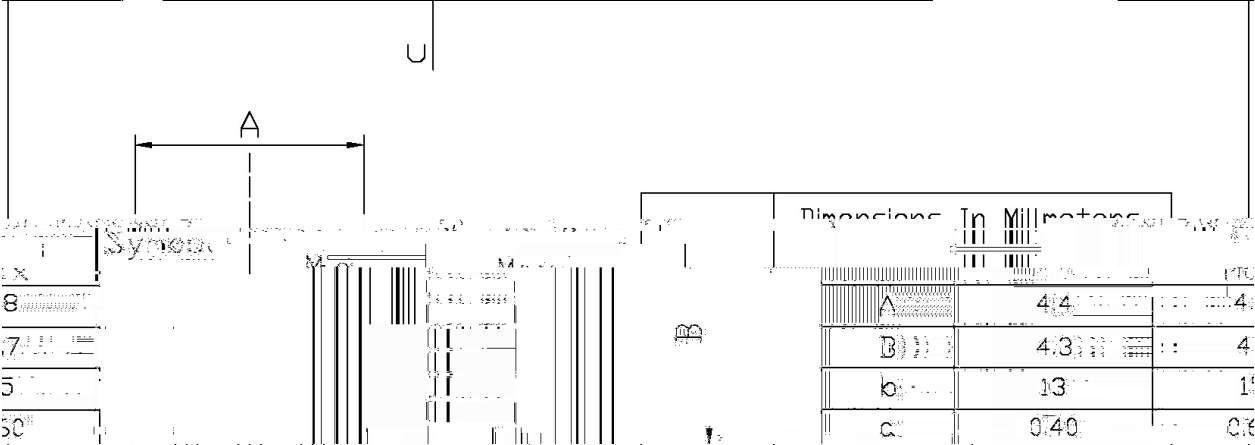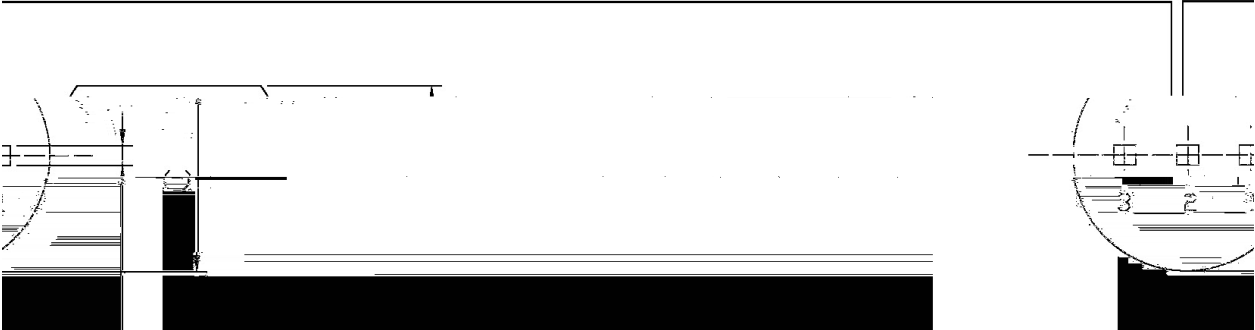

**/ Marking Instructions**

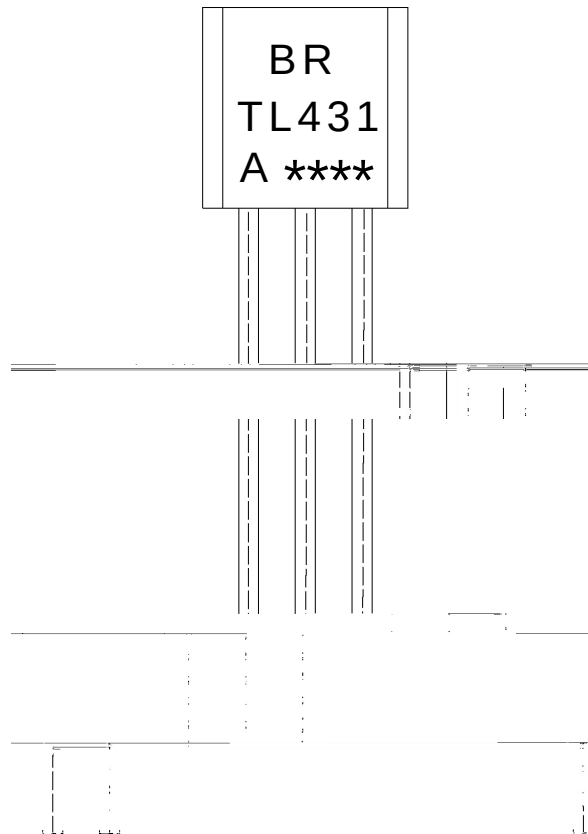

BR

TL431

A:  $V_{REF}$

\*\*\*\*

Note:


BR: Company Code.

TL431: Product Type.

A:  $V_{REF}$  Classifications Symbol

\*\*\*\*: Lot No. Code, code change with Lot No.

## ( ) / Temperature Profile for Dip Soldering(Pb-Free)

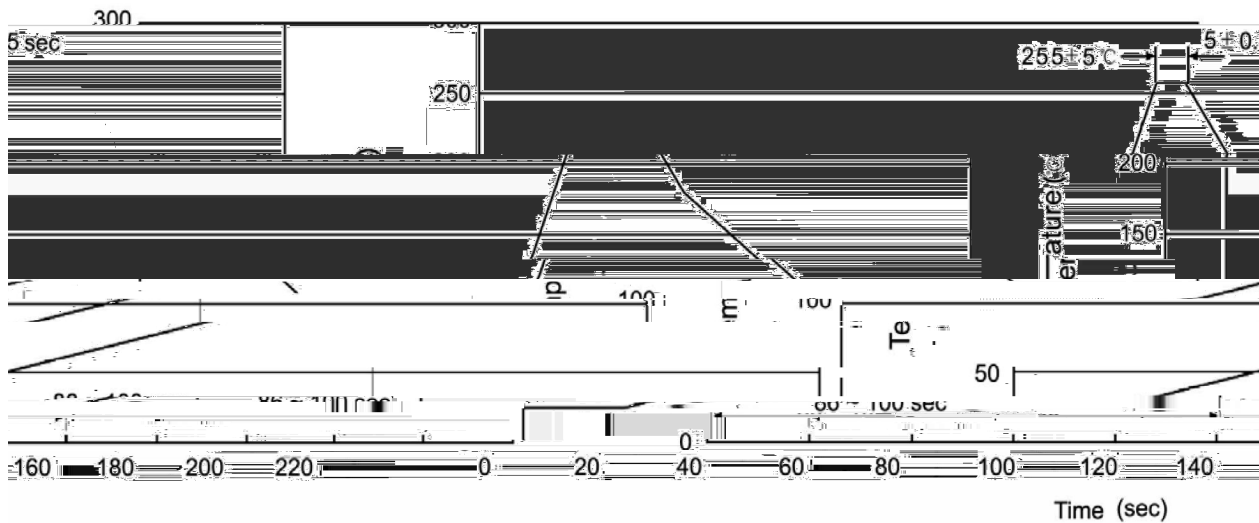

## Note:

- |   |       |     |           |                                          |                                       |
|---|-------|-----|-----------|------------------------------------------|---------------------------------------|
| 1 | 25    | 150 | 60        | 90sec;                                   | 1.Preheating:25~150°C, Time:60~90sec. |
| 2 | 255±5 |     | 5±0.5sec; | 2.Peak Temp.:255±5°C, Duration:5±0.5sec. |                                       |
| 3 |       | 2   | 10°C/sec. | 3. Cooling Speed: 2~10°C/sec.            |                                       |

## / Resistance to Soldering Heat Test Conditions

270±5°C      10±1 sec.      Temp:270±5°C      Time:10±1 sec

## / Packaging SPEC.

## / BULK

| Package Type<br>封装形式 | Units 包装数量       |                       |                        |                              |                        | Dimension 包装尺寸 (unit: mm3) |             |             |
|----------------------|------------------|-----------------------|------------------------|------------------------------|------------------------|----------------------------|-------------|-------------|
|                      | Units/Bag<br>只/袋 | Bags/Inner Box<br>袋/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Bag 袋                      | Inner Box 盒 | Outer Box 箱 |
| TO-92                | 1,000            | 10                    | 10,000                 | 5                            | 50,000                 | 135×190                    | 237×172×102 | 560×245×195 |
|                      | 1,000            | 10                    | 10,000                 | 10                           | 100,000                | 135×190                    | 237×172×102 | 560×245×375 |

## / AMMO

| Package Type<br>封装形式 | Units 包装数量         |                        |                         |                              |                        | Dimension 包装尺寸 (unit: mm3) |                                   |
|----------------------|--------------------|------------------------|-------------------------|------------------------------|------------------------|----------------------------|-----------------------------------|
|                      | Units/tape<br>只/纸带 | Tape/Inner Box<br>纸带/盒 | Rows/Inner Box<br>纸带层/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Inner Box 盒                | Outer Box 箱                       |
| TO-92                | 3,000              | 1                      | 120                     | 10                           | 30,000                 | 328×230×42                 | 小箱 480×346×235,<br>大箱 547×407×268 |