

/ Descriptions

/ Features

0

/ Applications

/ Equivalent Circuit



/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode


/ Marking

/ Absolute Maximum Ratings(Ta=25)

	θ								


/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

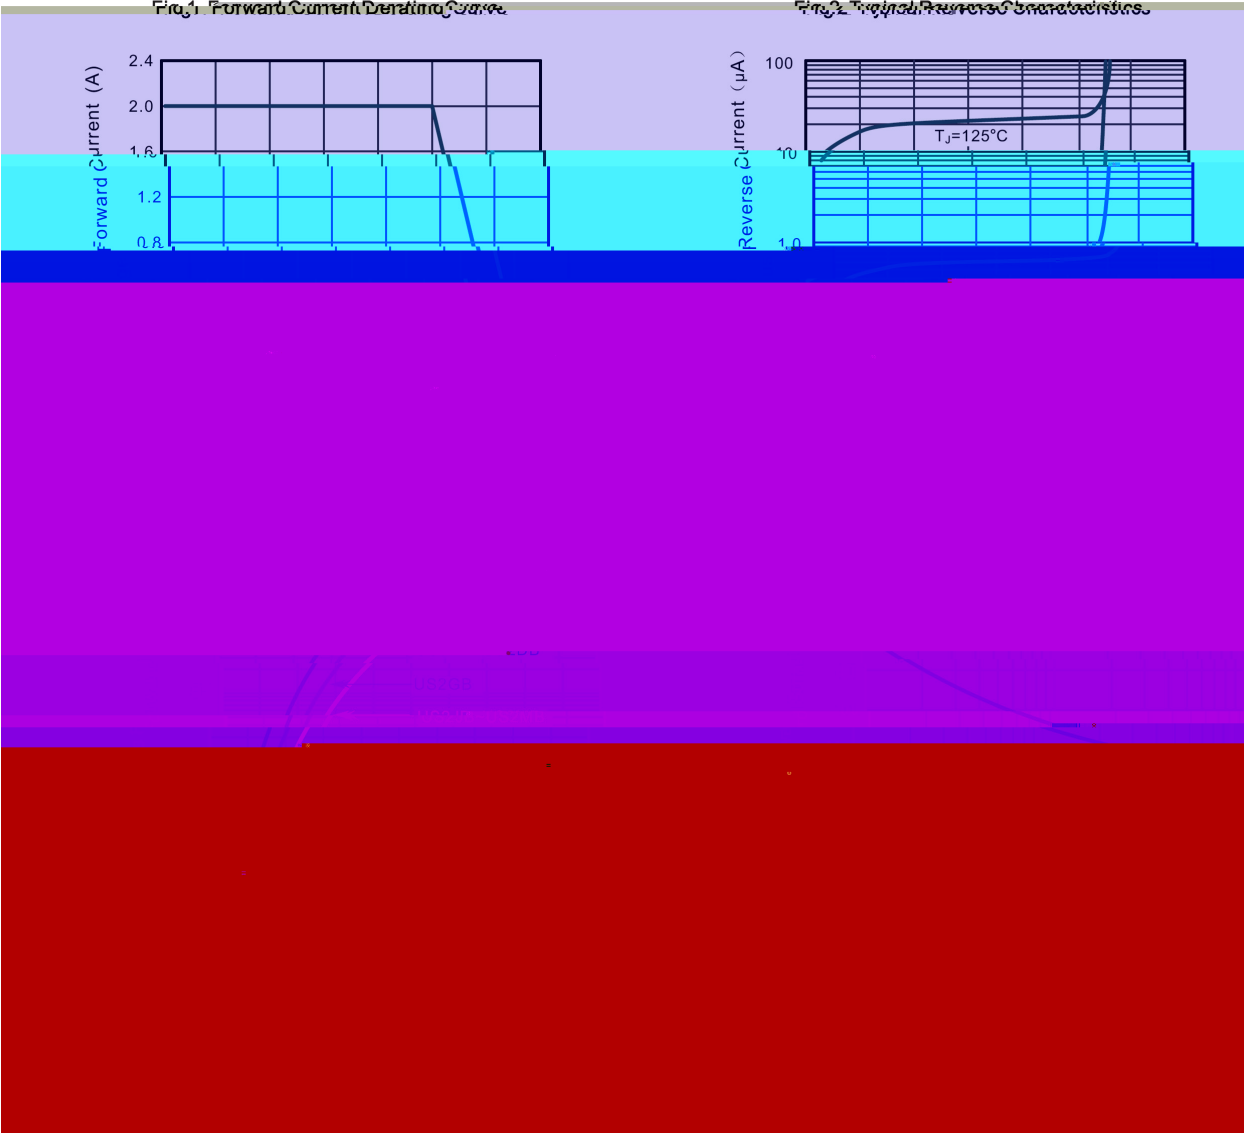

/ Package Dimensions


SMB

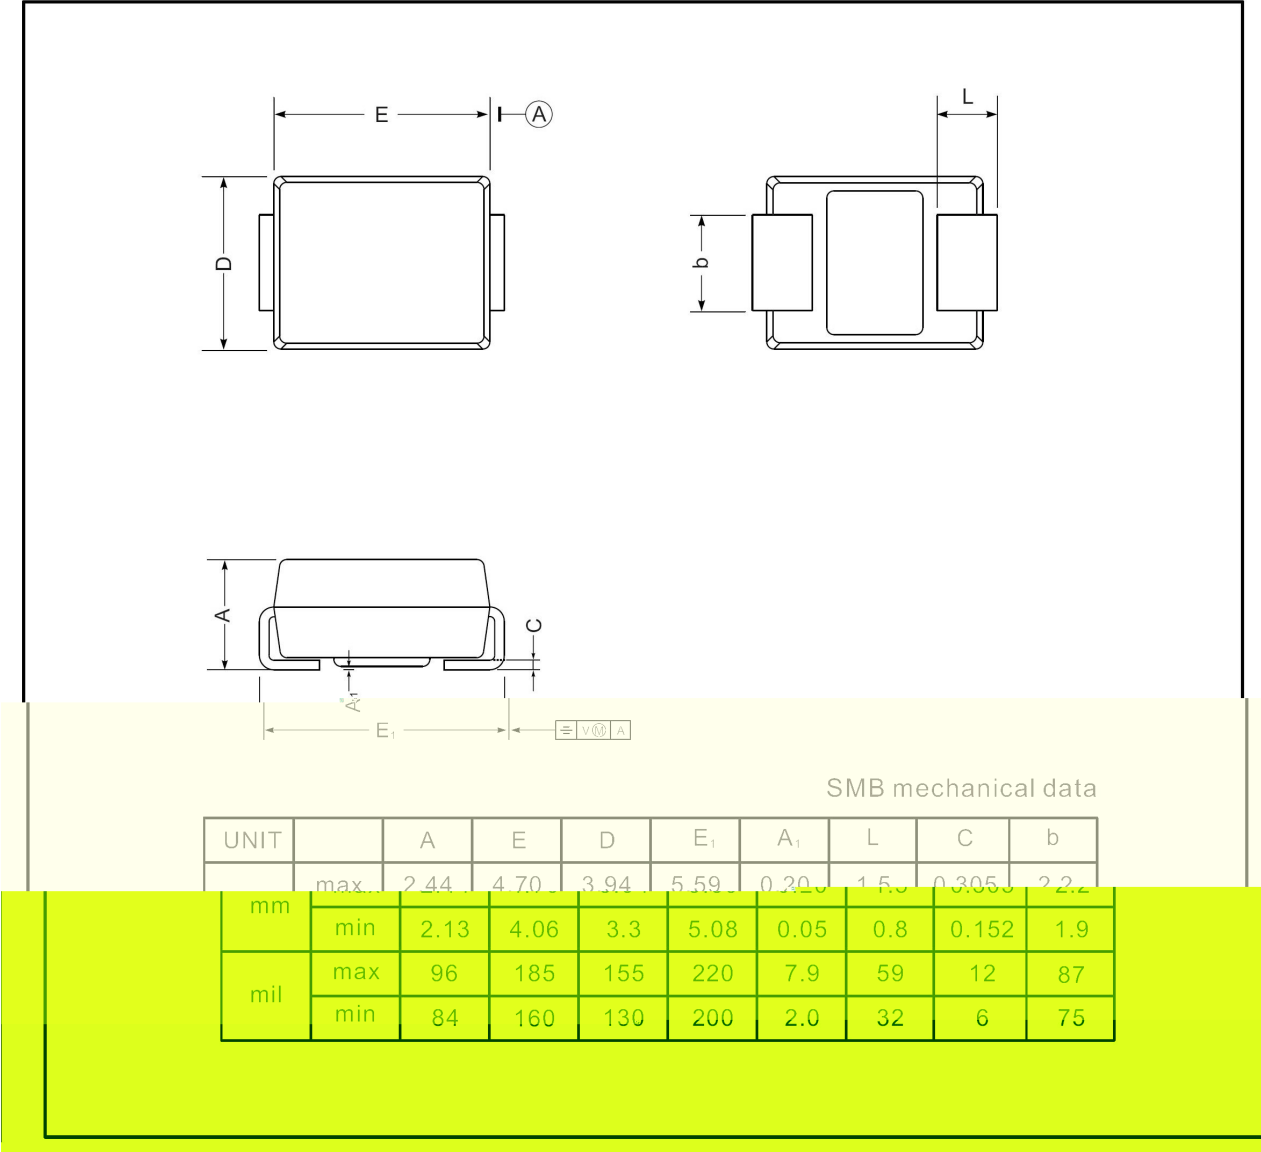

Marking

Type number	Marking code
US2AB	US2A
US2BB	US2B
US2DB	US2D
US2GB	US2G
US2JB	US2J
US2KB	US2K
US2MB	US2M

/ Marking Instructions

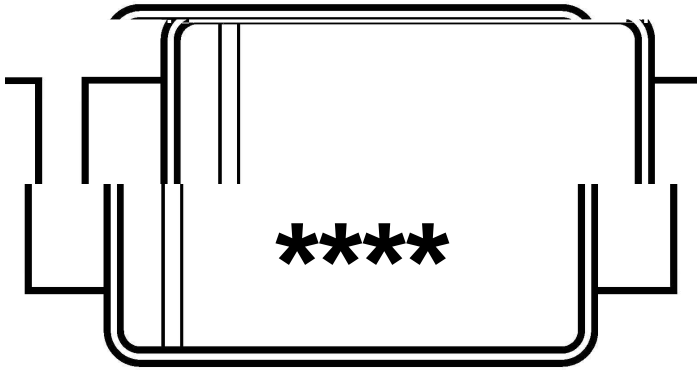

*****	*	*
*****	*	*

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

