

US3AB~US3MB



DATA SHEET

/ Descriptions


50V~1000V 3.0A SMB

/ Features

RoHS 2011/65/EU 0

/ Applications


/ Equivalent Circuit



/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

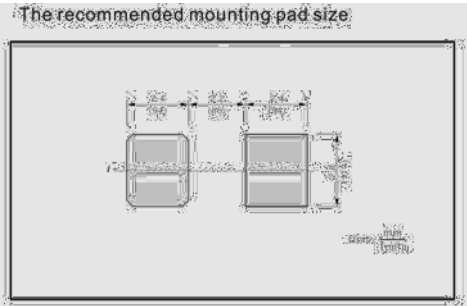


/ Marking




/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristic Curve

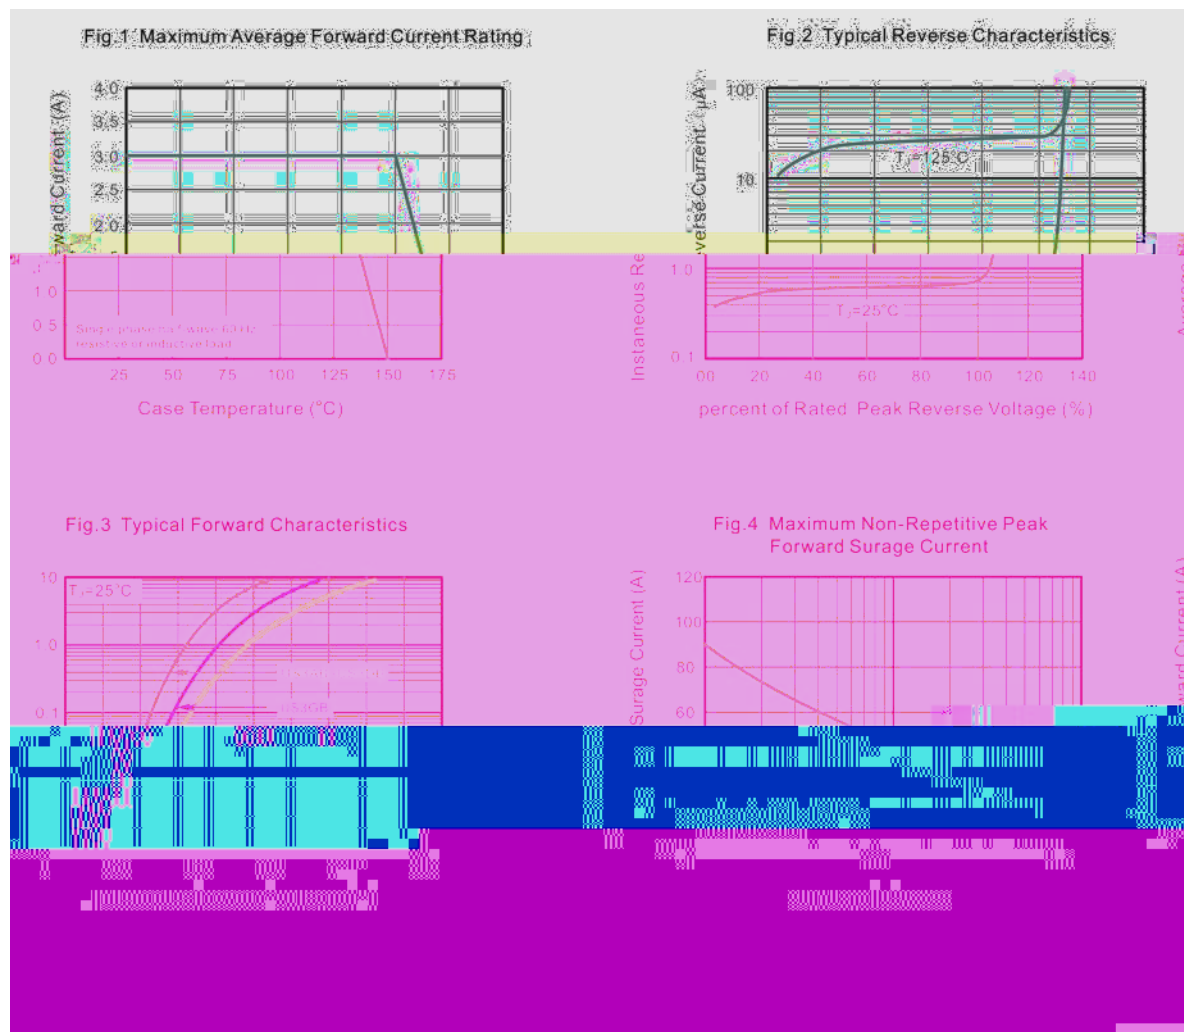


/ Package Dimensions

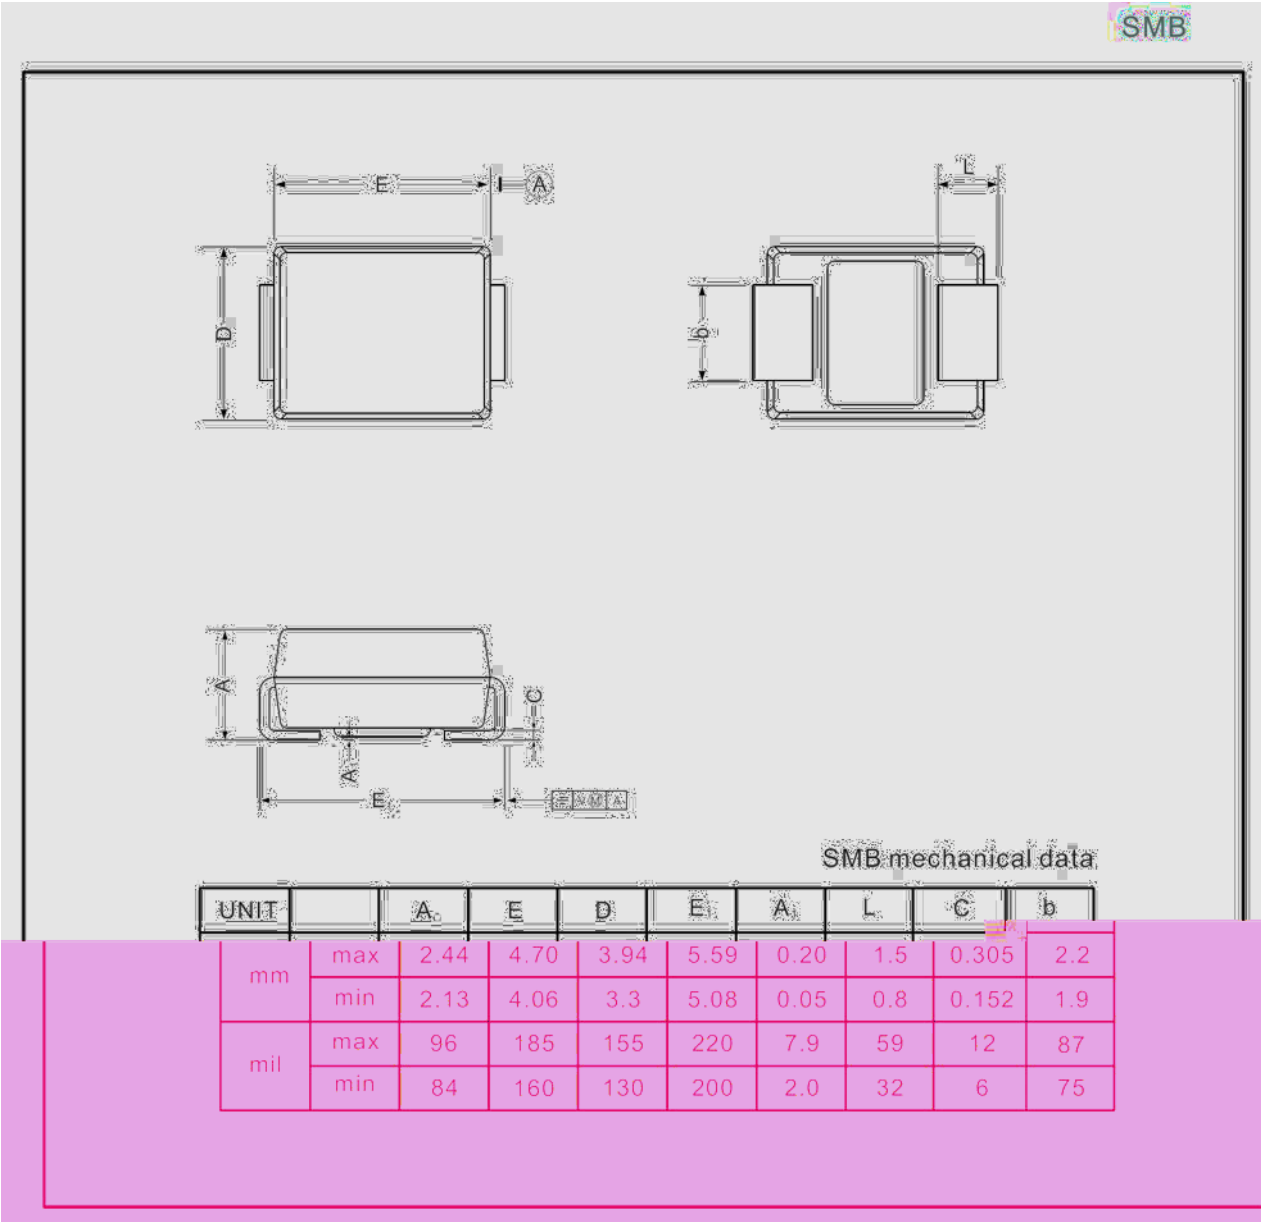


Type number	Marking code
-------------	--------------

/ Marking Instructions

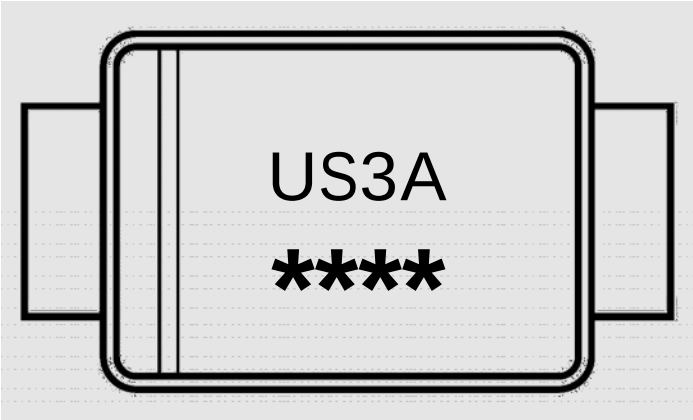

US3A		
****	1	3
US3A		
****		□

() / b n o o i i f i i i a b o d * o b

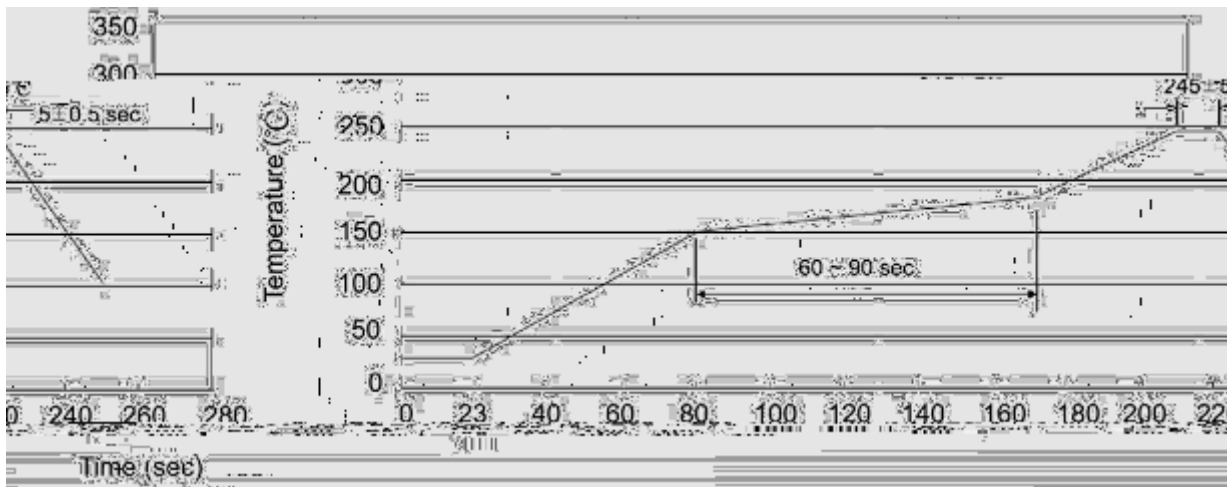
$$\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm$$

/ Resistance to Soldering Heat Test Conditions

$$\pm \quad \pm$$